



**SOLUTIONS SECURING YOUR WORLD**


## KEY FEATURES

- Powerful Decoding Capacity (Supports 16\* 1080P or 32\* 720P network cameras viewing at the same time)
- HDMI & VGA Dual Displays
- 4\* 3.5" HDD(4x 3.5"SATA HDD upto 10TB per drive)
- Dual LAN Interfaces (Designed for Multi-address, Load balancing & Fault-tolerance)
- H.265+H.264.
- Dual Monitor Display.
- 4K Video Capable.
- Raid 0/1/5/10
- Supports N+1 Hot spare

# SPECIFICATIONS

<b>Description</b>	16-Channel (NV-S16RM4)	
<b>Video/Audio Input</b>	IP Video Input	16-ch
	Two-way Audio Input	1*RCA/1*RCA
<b>Video/Audio Output</b>	HDMI/VGA Output	HDMI 1-CH, Resolution: 3840x2160/60Hz, 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz. (HDMI supports Audio Output) VGA 1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz.
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/ UXGA/720P/D1/VGA/CIF/QCIF
	Synchronous Playback	4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps@5MP), 8*(30fps @4MP), 10*(30fps @3MP), 16*(30fps @1080P), 16*(30fps @720P)
<b>Decoding</b>	Decoding format	H.265+/H.265(HEVC)/H.264+/H.264
	Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080P/ UXGA/720P/D1/VGA/CIF/QCIF
<b>Storage</b>	SATA	4 SATA interfaces
	Capacity	Up to 10TB per HDD
	eSATA	1 eSATA interface
<b>Disk Array</b>	Array Type	RAID 0, 1, 5, 6, 10
<b>Network</b>	Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS
<b>External Interface</b>	Network Interface	2* Network ports 100M/1000M
	Serial Interface	1*RS-485 Series Port for PTZ, 1*RS-232 Series Port for Console, 1*RS-485 Series Port for Keyboard
	USB Interface	1x USB 3.0; 2x USB 2.0
	Alarm In	16-ch
	Alarm Out	4-ch
	Audio Input/Output	1x RCA/1x RCA
<b>General</b>	Power Supply	AC 100V~240V 50Hz~60Hz
	Working Environment	Temperature: -10 DegC+55 DegC/ Humidity: 10%~90%
	Consumption	≤15W(Without HDD)
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting
	Advanced Function	ANR, N+1 Hot Spare)
	Compatibility	ONVIF
	Dimensions (WxDxH)	440mm(W)X320mm(D)X66.8mm(H), Rack Mountable Chassis (1.5U Standard)
	Weight (without HDD)	4.1Kg

## Interfaces

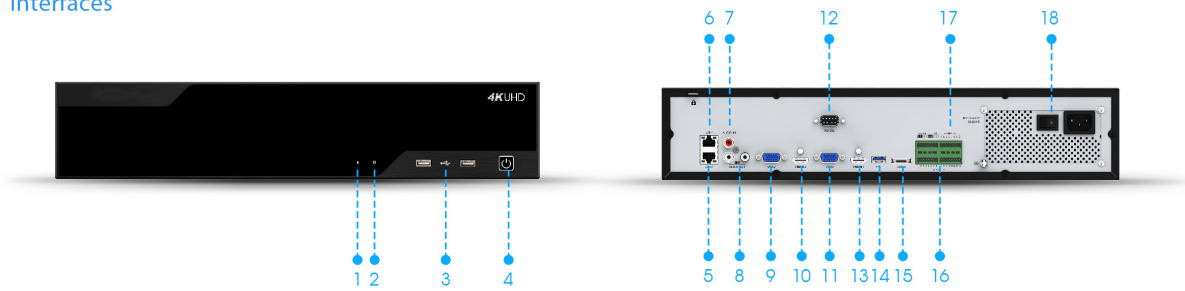

- 1. Run Indicator    2. HDD Indicator    3. USB    4. Power    5. LAN1    6. LAN2    7. Audio In    8. Audio Out
- 9. VGA2    10. HDMI2    11. VGA1    12. RS-232    13. HDMI1    14. USB    15. eSATA    16. Alarm In
- 17. Alarm Out    18. Power

## Installation of HDDs



## PARTCODE

## DESCRIPTION

NV-S16RM4

16-ch, 4 SATA interface, 1.5U, H.265 & 4K, Dual Network, Raid 0/1/5/10 supported.

UAE Address:  
 P3-Hamriyah Business Centre  
 PO Box 50235  
 Hamriyah Free Zone - Sharjah - UAE.  
 E-mail: [info@networkvideosolutionsfze.com](mailto:info@networkvideosolutionsfze.com)  
 Tel : +97148828919