



SOLUTIONS SECURING YOUR WORLD



KEY FEATURES

- 32/64-channel NVR with 8bay RAID
- Ultra 265/H.265/H.264
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Supports 2-ch HDMI, 1-ch VGA, HDMI2 at up to 4K(3840x2160)
- HDMI1/VGA and HDMI2 independent outputs
- Up to 12 Megapixels resolution recording
- HDD hot swap with RAID 0, 1, 5, 6, 10 storage scheme configurable
- 8 SATA HDDs, up to 10TB per drive
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support N+1 Hot spare

SPECIFICATIONS

Description	32-Channel (NV-S32R8)	64-Channel (NV-S64R8)	
Video/Audio Input	IP Video Input	32-ch	64-ch
	Two-way Audio Input	1-ch, RCA	
Video/Audio Output	HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz	
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
	Audio Output	1-ch, RCA	
	Synchronous Playback	16-ch	
	Corridor Mode Screen	3/4/5/7/9/10/12/16/32	
Decoding	Decoding format	Ultra 265, H.265, H.264	
	Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/960H/D1/2CIF/CIF	
	Capability	3x 12MP@25, 4x 4K@30, 8x 4MP@30, 16x 1080P@30, 32x 960P@25, 36x 720P@30, 64x D1	
Storage	SATA	8 SATA interfaces	
	Capacity	Up to 10TB for each HDD	
	eSATA	1 eSATA interface	
Disk Array	Array Type	RAID 0, 1, 5, 6, 10	
Smart	VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking	
	VCA Search	Face search, Behavior search	
	Statistical Analysis	People counting	
Network	IN/OUT Bandwidth	320Mbps	
	Protocol	SNMP,P2P, UPnP, NTP, DHCP, PPPoE	
External Interface	Network Interface	2x RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces	
	Serial Interface	1 x RS232, 1 x RS485	
	USB Interface	Front panel: 2x USB2.0, Rear panel: 1x USB3.0	
	Alarm In	16-ch	
	Alarm Out	4-ch	
General	Power Supply	100~240 VAC Power Consumption: ≤ 20 W(without HDD)	
	Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)	
	Dimensions (WxDxH)	442mm x531mm x86mm (17.4" x 20.9"x3.4")	
	Weight (without HDD)	≤ 5.13 Kg (11.31 lb)	

BACK PANEL

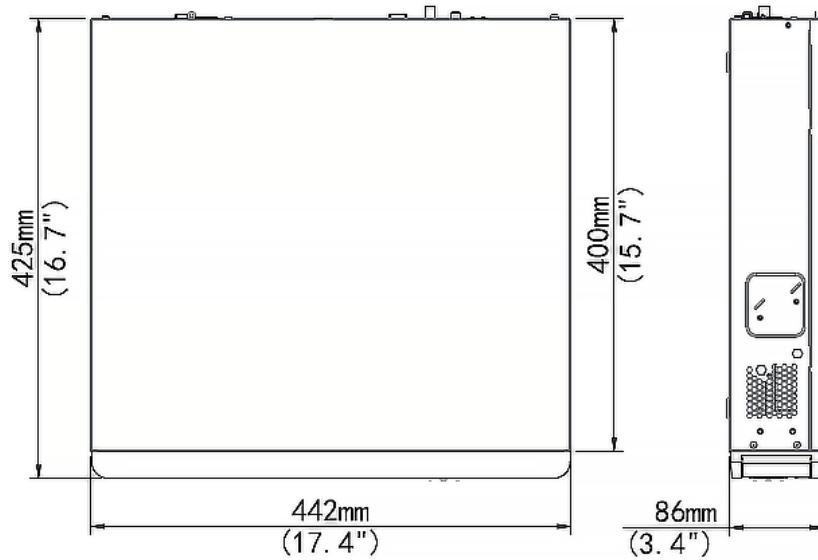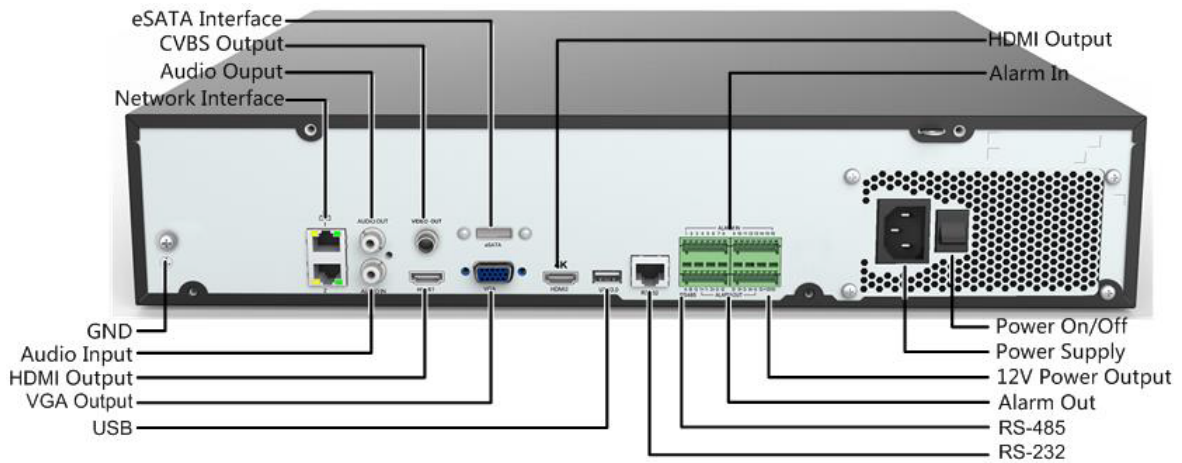

PARTCODE

DESCRIPTION

NV-S32R8

32-ch, 8 SATA interface, 3U, H.265 & 4K, Dual Network, RAID0/1/5/6/10, Hard disk hot swap, smart features

NV-S64R8

64-ch, 8 SATA interface, 3U, H.265 & 4K, Dual Network, RAID0/1/5/6/10, Hard disk hot swap, smart features

UAE Address:
P3-Hamriyah Business Centre
PO Box 50235
Hamriyah Free Zone - Sharjah - UAE.
E-mail: info@networkvideosolutionsfze.com
Tel : +97148828919

WWW.TGEN5.COM