

TG-B22FLU



SOLUTIONS SECURING YOUR WORLD

KEY FEATURES

- 4MP LightHunter Intelligent Bullet Network Camera
- High quality image with 4MP, 1/1.8" CMOS sensor
- 120dB Optical WDR
- Smart IR, up to 50m IR distance
- ONVIF Conformance
- 256GB Supports External Storage
- Support PoE power supply
- IP67 & IK10

SPECIFICATIONS

Description	4MP 30fps Fixed zoom lens, 120dB WDR LightHunter PoE Bullet Network Camera	
Camera	Image Sensor	1/1.8", 4.0 megapixel, progressive scan, CMOS
	Min. Illumination	0Lux with IR
		Color :0.001lux (F1.6, AGC ON)
	WDR	120dB Optical WDR
	Iris	Fix Aperture
	Shutter Time	Auto/Manual, 1 ~ 1/100000s
	IR Distance	Up to 50m
	Day & Night	IR-cut filter with auto switch (ICR)
	S/N	>55dB
	Angle of View (H)	H 94.7°
	Angle of View (V)	V 49.6°
Angle of View (O)	O 116.5°	
Lens	Lens options	4mm@F1.6, Fixed zoom lens
Video	Privacy Mask	Up to 8 areas
	Video Compression	Ultra 265,H.265,H.264,MJPEG
	Video Bit Rate	128 Kbps~16 Mbps
	Primary Stream	4MP(2688*1520),Max 30fps; 4MP(2560*1440),Max 30fps; 2MP(1920*1080), Max 30fps
	Secondary Stream	2MP (1920*1080), Max 30fps
	Tertiary Stream	D1 (720*576), Max 30fps
Network	Ethernet	1 x RJ45 10M/100M Ethernet Port
	Network Storage	ANR, NAS (NFS)
	Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
	Protocol	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, RTMP
Audio	Audio Compression	G.711U,G.711A, Supports 2 way Audio
System	Alarm I/O	1 Input: impedance 35kΩ; 1 Output: impedance 600Ω
	Advanced Function	Watermark, IP Address Filtering, Tampering Alarm, Alarm input, Alarm output, Access Policy, ARP Protection, RTSP Authentication, User Authentication
	Smart IR	Supports
	Event Trigger	Motion Detection, Network Disconnection, Audio Alarm, etc.
	Flip	Normal/Flip Vertical/Flip Horizontal/180°/90°Clockwise/90°Anti-clockwise
	Digital Noise Reduction	2D/3D DNR
	Storage	Support microMicro SD, up to 256 GB
General	Working Temperature	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
	Power Supply	DC 12V±25%, PoE (IEEE 802.3af)
	Power Consumption	Max 8.5W
	Weather Proof, Housing	Up to IP67-rated for Weather-resistant, Vandal-proof IK10-rated Metal Housing
	Dimensions	Ø245.6x85.7x85.4mm (Ø12.1"x3.4"x3.4")


ACCESSORIES



PM-B22FLU
Pole mount



IPM-B22FLU
Indoor Pedant Mount



JB-B22FLU
Junction Box






PMA-B22FLU
Pole Mount Adapter



WJ-B22FLU
Waterproof Joint

DIMENSIONS

Structure Diagram

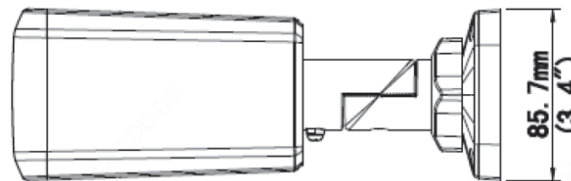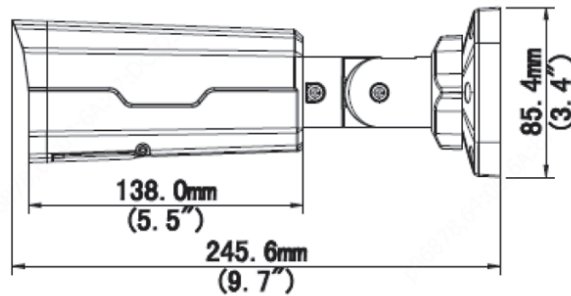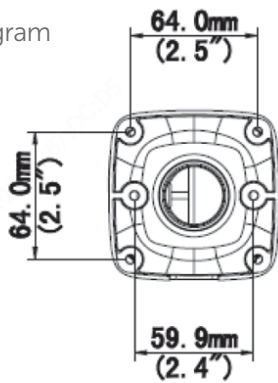

Units: mm

PARTCODE

DESCRIPTION

TG-B22FLU

4MP 30fps, Ultra 265/H.264 HD LightHunter IR fixed zoom Lens Bullet Network Camera, 120dB WDR, Triple streams, IR50 mtr, 3-streams, PoE, IK10, IP67.

UAE Address:
P3-Hamriyah Business Centre
PO Box 50235
Hamriyah Free Zone - Sharjah - UAE.
E-mail: info@tgen5.com
Tel : +97143488459

[HTTPS://TGEN5.COM](https://tgen5.com)