



TG-564SB



SOLUTIONS SECURING YOUR WORLD

KEY FEATURES

- 5 Megapixel Vandal-proof motorised Mini Bullet
- Smart Stream / Smart IR II
- Min. Illumination 0.005Lux@F1.2
- Advance Functions
- 3-Axis Mechanical Design
- 256GB External Storage
- IP67 & IK10
- Super WDR 120dB
- PoE Camera

SPECIFICATIONS

Description	5MP H.265+ VP mini Bullet, 120dB Super 120WDR, IR 50mtr, Motorized 2.7~13.5mm, PoE/12VDC	
Camera	Image Sensor	1/2.8" Progressive Scan CMOS
	Min. Illumination	Color: 0.005Lux@F1.2
		B/W: 0Lux with IR on
	WDR	120dB Super WDR
	Shutter Time	1/100000s~1s
	IR Distance	Up to 50m
	Day&Night	ICR Filter Auto Switch
S/N	>55dB	
Lens	Lens	Motorized 2.7~13.5mm/3.0~10.5mm/7~22mm@F1.4
	Focus Control	Auto/Manual
	Iris Control	Auto/Manual
Video	Max. Image Resolution	2592 x 1944
	Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG
Video	Video Bit Rate	16Kbps~16Mbps (CBR/VBR Adjustable)
	Primary Stream	30fps@(2592x1944),45fps@(2048x1536),60fps@(1920x1080) 20fps@(2592x1944)
	Secondary Stream	30fps@(704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x180)
	Tertiary Stream	30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192,
Network	Ethernet	1xRJ45 10M/100M Ethernet Port
	Network Storage	NAS(Support NFS, SMB/CIFS), ANR
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP,
System	Storage	Support micro SD/SDHC/SDXC Card Local Storage, upto 256GB
	AdvancedFunction	Privacy Masking,BLC,HLC,2DDNR,3DDNR,ROI, Defog, AWB, EIS, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark
	SIP/VoIPSupport	Yes,Voice&Video-over-IP
	EventTrigger	Motion Detection, Network Disconnection,etc.
	EventAction	FTP Upload,SMTP Upload,SD Card Record,SIP Phone,HTTP Notification etc.
	Video Analysis	Region Entrance/Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Human Detection, People Counting, Object Left
	System Compatibility	ONVIF Profile G & Q & S & T, API
General	Working Temperature	-40C~60C, Humidity 0~90% (Non-condensing)
	Power Supply	PoE (802.3af)/ DC 12V±10%
	Power Consumption	8.5W MAX, 12W MAX (With IR on)
	Weather Proof Housing	Upto IP67-rated for Weather-resistant Performance, Vandal-proof IK10-rated Metal Housing
	Dimensions/Weight	76mmX239.5mm/ 825g

ACCESSORIES



PM-564SB
Pole Mount



ICB-564SB
Internal Corner Bracket





ECB-564SB
External Corner Bracket



JB-564SB
Junction Box

DIMENSIONS

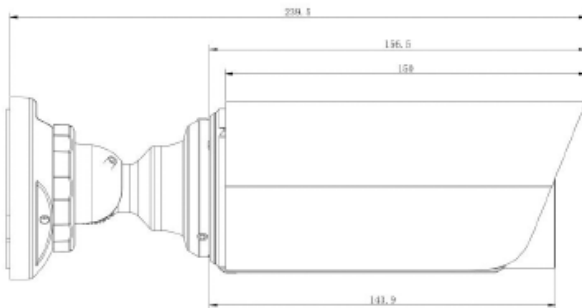

Units: mm

PARTCODE

TG-564SB

DESCRIPTION

5MP H.265+ VP mini Bullet, 120dB Super WDR, IR 50mtr, Motorized 2.7~13.5mm, microSD upto 256Gb, PoE/12VDC

UAE Address:
P3-Hamriyah Business Centre
PO Box 50235
Hamriyah Free Zone - Sharjah - UAE.
E-mail: info@tgen5.com
Tel: +97143488459

[HTTPS://TGEN5.COM](https://tgen5.com)