



# TG-V22LMB



**SOLUTIONS SECURING YOUR WORLD**

## KEY FEATURES

- 2MP IR Water-proof Fixed Bullet Network Dome Camera
- 30 ~ 50m IR night view distance
- 3D DNR, HLC, BLC, Defog, Smart IR & ROI coding
- Digital WDR
- 1CH audio input
- Support 3 streams
- 128GB Supports External Storage
- Intelligent analytics
- DC12V/PoE
- IP67

# SPECIFICATIONS

<b>Description</b>	2MP @ 30fps IR Water-proof Fixed Bullet Network Camera	
<b>Camera</b>	Image Sensor	1 / 2.8" CMOS
	Shutter	1 s ~ 1 / 100000 s
	Minimum Illumination	0.0035 lux@F1.2,AGC ON; 0 lux with IR 0.009 lux@F1.6,AGC ON; 0 lux with IR
	Lens	2.8 mm @F1.6, H.FoV: 103.7°,V.FoV:55.1°, D.FoV:124° 3.6 mm @F1.6, H.FoV: 86.1°,V.FoV:43.7°, D.FoV:103°
	Lens Mount	M12
	IR Distance	Up to 50m
	WDR	Digital WDR
<b>Video</b>	Video Compression	H.265 / H.264
	H.265 Compression	Main Profile @ Level 4.1 High Tier
	Resolution	1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
	Primary Stream	60Hz : 1080P( 1 ~ 30fps ) / 720P( 1 ~ 30fps ) 50Hz : 1080P( 1 ~ 25fps ) / 720P ( 1 ~ 25fps )
	Secondary Stream	60Hz : D1/CIF (1~30fps); 50Hz: D1/CIF (1~25fps)
	Third Stream	60Hz : D1/CIF/480×240 (1~30fps); 50Hz: D1/CIF/480×240 (1~25fps)
	Bit Rate	64 Kbps ~ 6 Mbps
	Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness,
	ROI	Each ROI to be configured separately
	<b>System</b>	Remote Monitoring
Audio		1CH audio input
Online Connection		Support simultaneous monitoring for up to 3 users, Support multi-stream real time transmission
Interface Protocol		ONVIF
Smart Alarm		Motion detection, SD card full, SD card error
Intelligent Analytics		Video blur detection, scene change detection, line crossing detection, region intrusion detection and object removal detection (object left/missing)
Function		Watermark, IP address filtering, video mask, heartbeat, illegal login lock
<b>Storage</b>	Storage	Network remote storage; micro SD card
<b>Network</b>	Protocols	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
<b>Interface</b>	Ethernet	1*RJ45 10M/100M Ethernet Port
<b>General</b>	Power	DC12V / PoE
		Power consumption: < 7W
	Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non condensing)
	Dimensions	217.8 × 80.5 × 80.3
	Weight	Approx. 0.65 Kg

## ACCESSORIES



PM-V21LFD  
Pole Mount




ECB-V21LFD  
External Corner Bracket



JB-V21LFD  
Junction Box

## DIMENSIONS

Structure Diagram

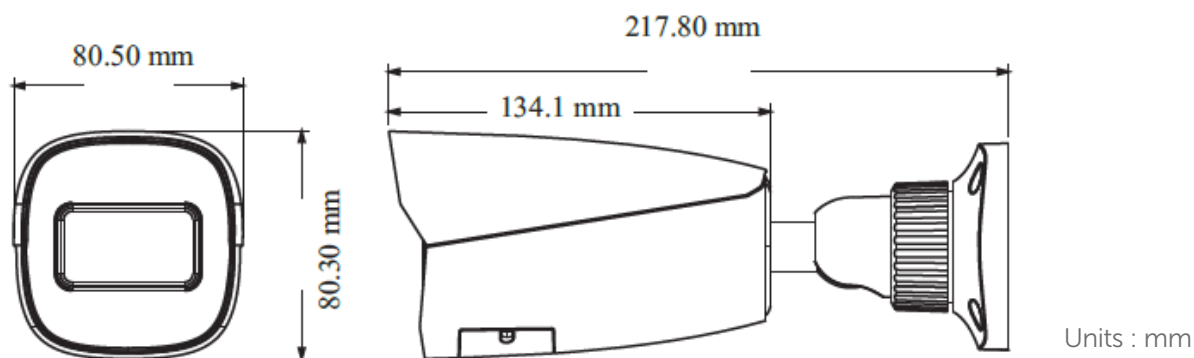

## PARTCODE

## DESCRIPTION

TG-V22LMB

2MP Bullet fixed 2.8/3.6mm, Smart H.265/H.264, Digital WDR, Smart IR upto 50m, Smart Analytics, Face Detection, IP67, 3 streams, Intelligent Analytics supported, DC12V / PoE.

UAE Address:  
P3-Hamriyah Business Centre  
PO Box 50235  
Hamriyah Free Zone - Sharjah - UAE.  
E-mail: info@tgen5.com  
Tel : +97143488459

[HTTPS://TGEN5.COM](https://tgen5.com)