



TG-V24LFD



SOLUTIONS SECURING YOUR WORLD

KEY FEATURES

- 2MP Fixed H265 Turret Network Dome Camera
- 30 ~ 50m white light view distance
- 3D DNR, HLC, BLC, Defog, Smart IR & ROI coding
- Digital WDR
- Support dual streams
- 128GB Supports External Storage
- DC12V/PoE
- Intelligent analytics
- IP67

SPECIFICATIONS

Description	2MP H.265/H.264 Fixed IR Turret Network Dome Camera	
Camera	Image Sensor	1 / 2.8" CMOS
	Shutter	1 s ~ 1 / 100000 s
	Minimum Illumination	0 lux (LED ON)
	Lens	2.8 mm @F1.0, H.FoV: 109°; V.FoV:76.4°; D.FoV:116.2° 3.6 mm @F1.0, H.FoV: 84.8°; V.FoV:54.4°; D.FoV:92.7°
	Digital NR	3D DNR
	Angle Adjustment	Pan: 0°~360°; Tilt:0°~75°; Rotation: 0°~360°
	WDR	Digital WDR
Video	Video Compression	Main stream: H.265 / H.264; Sub stream: H.265 / H.264 / MJPEG
	H.264 Compression	Baseline Profile/Main Profile/High Profile
	Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
	Primary Stream	60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
	Secondary Stream	60Hz : D1/CIF/480x240 (1~30fps); 50HZ: D1/CIF/480x240 (1~25fps)
	Third Stream	60Hz:D1/CIF 480 240 (1~30fps); 50Hz:/ × D1/CIF/480x240 (1~25fps)
	Bit Rate	128 Kbps ~ 6Mbps
	Image Settings	ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness, Image Flip, Image Mirror, NR, etc.
	ROI	Each ROI to be configured separately
	Audio	1CH built-in MIC
System	Remote Monitoring	Web browsing, CMS, remote control
	Online Connection	Support simultaneous monitoring for up to 3 users,; Support multi-stream real time transmission
	Interface Protocol	ONVIF
	Smart Alarm	Motion detection, SD card error, SD card full
	Intelligent Analytics	Video blur detection, intrusion detection and line crossing detection
	Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
Storage	Storage	Built-in micro SD card slot; up to 128GB
Network	Protocols	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPs, HTTP, QoS
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port
General	Power	DC12V/PoE
		Power consumption: < 4W
	Operating Conditions	- 30 °C ~ 60°C (-22°F~140°F) Humidity: less than 95 % (non condensing)
	Dimensions	94.6 × 82.8
Weight	Approx. 0.45 Kg	

ACCESSORIES



PM-V24LFD
Pole Mount





ECB-V24LFD
External Corner Bracket



JB-V24LFD
Junction Box

DIMENSIONS

Structure Diagram

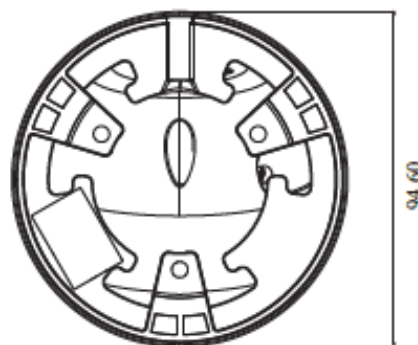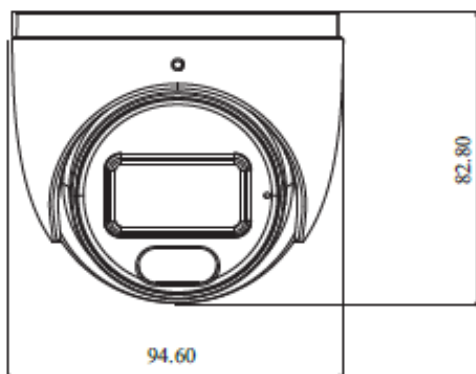

Units : mm

PARTCODE

DESCRIPTION

TG-V24LFD

2MP Smart H.265 Fixed Dome Camera @ 30fps Digital WDR, Smart IR upto 50m, Smart Analytics, IP67, 2 streams, Intelligent Analytics supported, DC12V/PoE.

UAE Address:
P3-Hamriyah Business Centre
PO Box 50235
Hamriyah Free Zone - Sharjah - UAE.
E-mail: info@tgen5.com
Tel : +97143488459

[HTTPS://TGEN5.COM](https://tgen5.com)