



TG-V24SFB



SOLUTIONS SECURING YOUR WORLD

KEY FEATURES

- 2MP IR Water-proof Bullet IP Camera
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR, HLC, BLC, Defog
- Digital WDR
- 1CH audio input
- Support triple streams
- 128GB Supports External Storage
- Intelligent analytics
- DC12V/PoE
- IP67

SPECIFICATIONS

Description	2MP @ 25fps IR Water-proof Fixed Bullet Network Camera	
Camera	Image Sensor	1 / 2.9" CMOS
	Shutter	1 / 25 s ~ 1 / 100000 s
	Minimum Illumination	0.0035 lux@F1.2,AGC ON; 0 lux with IR 0.009 lux@F1.6,AGC ON; 0 lux with IR
	Lens	2.8 mm @F2.0, (fixed lens), horizontal field of view: 107° 3.6 mm @F2.0, (fixed lens), horizontal field of view: 84.8° 6 mm @F2.0, (fixed lens), horizontal field of view: 52°
	Lens Mount	M12
	IR Distance	Up to 30m
	WDR	Digital WDR
Video	Video Compression	Main stream: H.265 / H.264 Sub stream: H.265 / H.264 / MJPEG
	H.265 Compression	Main Profile @ Level 4.1 High Tier
	Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
	Primary Stream	60Hz : 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
	Secondary Stream	60Hz : D1/CIF 480x240 (1~30fps); 50HZ: D1/CIF 480x240 (1~25fps)
	Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50HZ: D1/CIF/480x240 (1~25fps)
	Bit Rate	VBR / CBR
	Image Settings	ROI, Saturation, Brightness, Chroma, Contrast,Wide Dynamic, Defog, Sharpen, NR,etc. adjustable through client software or web browser
	ROI	Each ROI to be configured separately
System	Remote Monitoring	Web browsing, CMS remote control
	Audio	1CH audio input
	Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
	Interface Protocol	ONVIF
	Smart Alarm	Motion detection, SD card full, SD card error
	Intelligent Analytics	Video blur detection, line crossing detection and region intrusion detection
	Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
Storage	Storage	Network remote storage; micro SD card
Network	Protocols	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, 802.1x, FTP, UPnP, HTTPs, HTTP, QoS
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port
General	Power	DC12V / PoE
		Power consumption: < 5.5W
	Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non condensing)
	Dimensions	167.5 × 74.5 × 74.
	Weight	Approx. 0.39 Kg

ACCESSORIES



PM-V24SFB
Pole Mount




ECB-V24SFB
External Corner Bracket



JB-V24SFB
Junction Box

DIMENSIONS

Structure Diagram

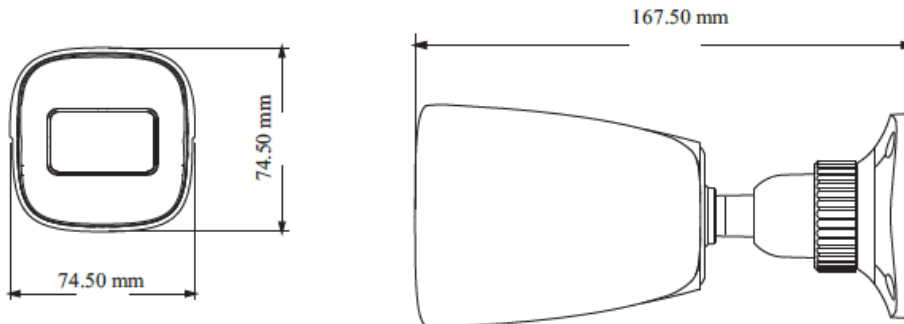

Units : mm

PARTCODE

DESCRIPTION

TG-V24SFB

2MP @ 25fps H.265 Bullet IP Dome Camera, Fixed Lens 2.8 mm/3.6 mm, IR30m, d-WDR, Support 3 streams, Built-in microSD upto 128GB, DC12V/PoE, IP67.

UAE Address:
P3-Hamriyah Business Centre
PO Box 50235
Hamriyah Free Zone - Sharjah - UAE.
E-mail: info@tgen5.com
Tel : +97143488459

[HTTPS://TGEN5.COM](https://tgen5.com)