



# TG-V26ZB



**SOLUTIONS SECURING YOUR WORLD**

## KEY FEATURES

- 2MP @ 30fps IR Starlight motorized Bullet Network Camera
- 30 ~ 50m IR night view distance
- 3D DNR, HLC, BLC, Defog, Smart IR & ROI coding
- WDR 120dB
- Starlight
- Support corridor mode
- Support 3 streams
- DC12V/PoE power supply
- Supports 256GB microSD storage
- Intelligent analytics
- IP67

# SPECIFICATIONS

<b>Description</b>	2MP @ 30fps, Smart H.265 /H.265+/H.265 IR Motorized Bullet Network Camera.	
<b>Camera</b>	Image Sensor	1 / 2.8 "CMOS
	Shutter	1 s ~ 1 / 100000 s
	Minimum Illumination	0.005 lux@F1.6,AGC ON; 0 lux with IR 0.0028 lux@F1.2,AGC ON; 0 lux with IR
	Day/Night	ICR
	Iris Control	DC Iris
	Lens	2.8~12mm@F1.4, H.FoV: 103°~32° ; V. FoV: 70.5°~18.3° ; D.Fov:110.6°~36.4°
	Digital NR	3D DNR
	IR Distance	Up to 50m
	WDR	120dB
<b>Video</b>	Resolution	1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 × 240
	H.265 Video Compression	Baseline Profile/Main Profile/High Profile
	Video Compression	Main stream: Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
	Primary Stream	60Hz:1080P/720P(1 ~ 30fps) ; 50Hz:1080P / 720P( 1 ~ 25fps )
	Secondary Stream	60Hz:720P/D1/CIF (1~30fps); 50Hz:720P/D1/CIF/480×240 (1~25fps)/480×240
	Tertiary Stream	60Hz:D1/CIF 480 240 (1~30fps); 50Hz:/ × D1/CIF/480×240 (1~25fps)
	Bit Rate	64 Kbps ~ 6 Mbps
	Image Settings	ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness,NR etc.
	ROI	Each ROI to be configured separately
<b>Audio</b>	1CH audio input	Support
<b>System</b>	Remote Monitoring	Web browsing,CMS remote control
	Online Connection	Support simultaneous monitoring for up to 10 users,; Support multi-stream real time transmission
	Interface Protocol	ONVIF
	Smart Alarm	Motion detection, SD card error, SD card full
	Intelligent Analytics	Video blur detection, scene change detection, line crossing detection and region, intrusion detection, Face detection and face capture
	Function	Watermark, IP address filtering, video mask, heartbeat, password protection, image distortion correction
<b>Storage</b>	Storage	Network remote storage; micro SD card storage
<b>Network</b>	Protocols	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, ICMP, IGMP, FTP,PPPoE, DDNS, SMTP,SNMP,HTTP, 802.1x, UPnP, HTTPs, QoS
<b>Interface</b>	Ethernet	1x RJ45 10M/100M Ethernet Port
<b>General</b>	Power	DC12V/PoE
		Power consumption: < 9.5W
	Operating Conditions	- 30 °C ~ 60°C (-22°F~140°F) Humidity: less than 95 % (non condensing)
	Dimensions	217.7 × 80.5 × 80.5
Weight	Approx. 0.67KG	

## ACCESSORIES



PM-V26ZB  
Pole Mount





ECB-V26ZB  
External Corner Bracket



JB-V26ZB  
Junction Box

## DIMENSIONS

Structure Diagram

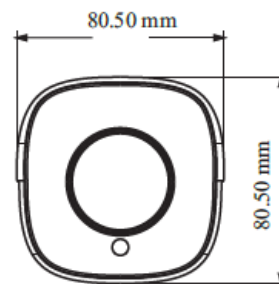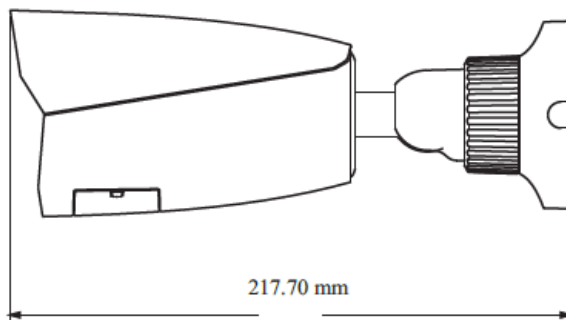

Units : mm

PARTCODE

DESCRIPTION

TG-V26ZB

2MP @ 30fps Motorized 2.8~12mm, H.265+/H.265/H.264+/H.264 Starlight Bullet Camera, Color:0.005Lux @ F1.6, WDR 120dB, IR50m, Support VCA Line crossing counting, intrusion counting, IP67, PoE/DC12V.

UAE Address:  
P3-Hamriyah Business Centre  
PO Box 50235  
Hamriyah Free Zone - Sharjah - UAE.  
E-mail: info@tgen5.com  
Tel : +97143488459

[HTTPS://TGEN5.COM](https://tgen5.com)