



TG-V41LFB



TG5

SOLUTIONS SECURING YOUR WORLD

KEY FEATURES

- 4MP H.265 / H.264 IR Water-proof Bullet Network Camera
- 10 ~ 20m IR night view distance
- 3D DNR, HLC, BLC, Defog, Smart IR & ROI coding
- Digital WDR
- Support 3 streams
- DC12V/PoE
- Intelligent analytics
- IP67

SPECIFICATIONS

Description	4MP H.265 / H.264 IR Water-proof PoE Bullet Network Camera	
Camera	Image Sensor	1 / 2.7 "CMOS
	Shutter	1 s ~ 1 / 100000 s
	Image Size	2560x1440
	Minimum Illumination	0.011 lux @F1.2, AGC ON; 0 lux with IR 0.04 lux @ F2.2, AGC ON; 0 lux with IR
	Day/Night	ICR
	Lens	2.8 mm @F2.0, (fixed lens), horizontal field of view :110° 3.6 mm @F2.2, (fixed lens), horizontal field of view: 89°
	Digital NR	3D DNR
	IR Distance	Up to 20m
	WDR	Digital WDR
Video	Video Compression	H.265 / H.264
	H.264 Compression	Main Profile@Leve4.1 High Tier
	Resolution	4MP (2560 × 1440), 3MP (2304 × 1296) 1080P (1920 × 1080) 720P (1280 × 720), D1, CIF, 480 × 240
	Primary Stream	60Hz : 4MP(1~20fps)/3MP(1~25fps)/1080P(1~25fps) 50Hz : 4MP(1~20fps)/3MP(1~30fps)/1080P(1~30fps);
	Secondary Stream	60Hz : 720P(1~15fps)/D1(1~30fps) /CIF (1~30fps); 50HZ : 720P(1~12fps)/D1(1~25fps)/CIF (1~25fps);
	Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50HZ: D1/CIF/480x240 (1~25fps)
	Bit Rate	64 Kbps ~ 5 Mbps
	Image Settings	ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness,
	ROI	Each ROI to be configured separately
System	Remote Monitoring	Web browsing,CMS remote control
	Online Connection	Support simultaneous monitoring for up to 4 users,; Support multi-stream real time transmission
	Interface Protocol	ONVIF
	Smart Alarm	Motion detection
	Intelligent Analytics	Region intrusion detection, object removal detection, abnormal video detection and line crossing detection
	Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock
Network	Protocols	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, 802.1x, SMTP, FTP, UPnP, HTTPs, HTTP, QoS
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port
General	Power	DC12V/PoE
		Power consumption: < 4W
	Operating Conditions	- 20 °C ~ 55 °C (-4°F~131°F) Humidity: less than 95 % (non condensing)
	Dimensions	162.1 × 74.8 × 73.8
	Weight	Approx. 0.24 Kg

ACCESSORIES



PM-V41LFB
Pole Mount




ECB-V41LFB
External Corner Bracket



JB-V41LFB
Junction Box

DIMENSIONS

Structure Diagram

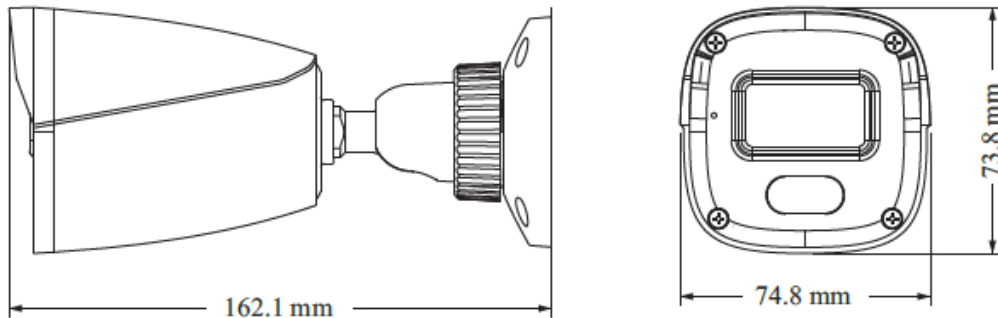

Units : mm

PARTCODE

DESCRIPTION

TG-V41LFB

4MP Bullet motorized lens:2.8-3.6mm , Smart H.265/H.264, Digital WDR, Smart IR upto 20m, Smart Analytics, Face Detection, IP67, 3 streams, Intelligent Analytics supported, DC12V/PoE.

UAE Address:
P3-Hamriyah Business Centre
PO Box 50235
Hamriyah Free Zone - Sharjah - UAE.
E-mail: info@tgen5.com
Tel : +97143488459

[HTTPS://TGEN5.COM](https://tgen5.com)