



SOLUTIONS SECURING YOUR WORLD

KEY FEATURES

- 2MP Bullet Day/Night Vandal proof Camera
- Smart IR, up to 50m IR distance
- 120dB Optical WDR
- 2D/3D DNR
- Ultra 265, H.265, H.264, MJPEG
- Triple streams
- ROI (Region of Interest)
- ONVIF Conformance
- IP67


SPECIFICATIONS

Description	2 MP Bullet IP 120db WDR, IR Bullet	
Camera	Image Sensor	1/2.8", 2.0megapixel, progressive scan, CMOS
	Lens	2.8~12mm, automatic focusing and motorized zoom lens
	Angle of View(H)	94.0° ~ 28°
	Angle of View (V)	56.7°~14.4°
	Adjustment angle	Pan: 0°~360°, Tilt: 0°~90° & Rotate: 0°~360°
	Shutter	Auto/Manual, 1~ 1/100000s
	Minimum Illumination	Colour: 0.001Lux (F1.6, AGC ON) 0Lux with IR on
	Day/Night	IR-cut filter with auto switch (ICR)
	Digital noise reduction	2D/3D DNR
	S/N	>52dB
	IR Range	Up to 50m
	WDR	120dB
Video	Video Compression	Ultra 265, H.265, H.264, MJPEG
	Frame Rate	Main Stream:2MP (1920*1080), Max 30fps; Sub Stream: 2MP (1920*1080), Max 30fps; Third Stream:D1 (720*576), Max30fps
	Image Settings	Rotate mode, Saturation, Brightness, Contrast
	HLC/ Privacy Mask/OSD	Supported
Audio	Audio Compression	G.711
Storage	Edge Storage	Micro SD, up to 256GB
Network	Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
	Compatible Integration	ONVIF(Profile S, Profile G, Profile T), API
Interface	Audio I/O	Input: impedance 35kΩ; amplitude 2V [p-p], Output: impedance 600Ω; amplitude 2V [p-p]
	Network	1 RJ45 10M/100M Base-TX Ethernet
General	Power	DC 12V±25%, PoE (IEEE 802.3af)
		Power consumption: Max 9W
	Operating Conditions	-35°C ~ 60°C (-31°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
	Ingress Protection Level	IP67
	IR Range	50m
	Dimensions	253.4 x86 x71.7mm (9.98" x 3.4" x 2.8")
Weight	1.0kg (2.2lb)	

ACCESSORIES



FCM-NB622Z
False Ceiling mount





WM- NB622Z
Wall mount



JB- NB622Z
Junction Box

DIMENSIONS

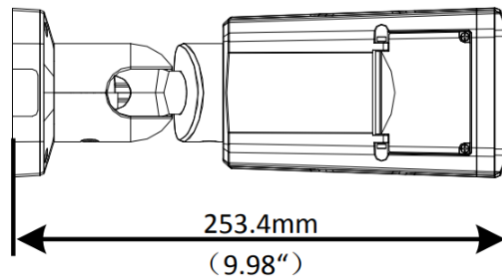

PARTCODE

NV-NB622Z

DESCRIPTION

2MP IP Bullet, 120db WDR, Ultra 265, H.265, PoE, Motorized VF
2.8-12mm, 50m IR, SD Card, IP67

UAE Address:
P3-Hamriyah Business Centre
PO Box 50235
Hamriyah Free Zone - Sharjah - UAE.
E-mail: info@networkvideosolutionsfze.com
Tel : +97148828919

WWW.TGEN5.COM