




TG-V32NR

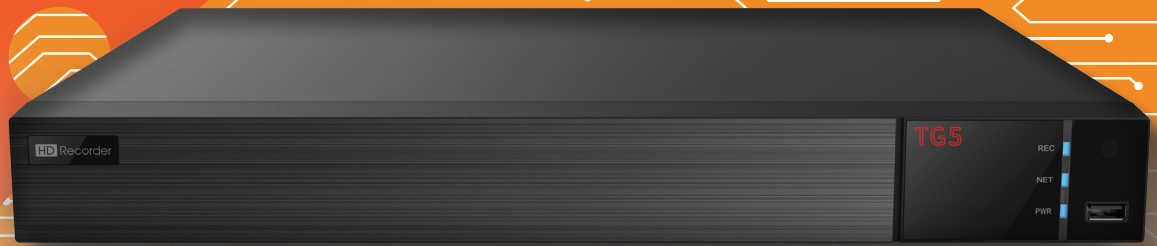

SOLUTIONS SECURING YOUR WORLD

KEY FEATURES


- 32 Channel 4K NVR
- Support POS information overlay on live view and playback
- Supports multiple VCA (Video Content Analytics)
- 16CH simultaneous playback
- Graphic User Interface (GUI)
- H.265+H.264.
- DHCP, DDNS, PPPoE network protocol
- Dual stream technology for local storage with high definition
- Multi-user online simultaneously
- Powerful mobile surveillance by smart phones with iOS and Andriod

SPECIFICATIONS

Description	32-Channel,4K, H265, ultra high definition display NVR		
Video/Audio Input	IP Video Input	32-Channel	
	Two-way Audio Input	1xRCA/1xRCA	
Video/Audio Output	HDMI/VGA Output	Network Input Resolution: 8MP/6MP/ 5MP/4MP/3MP/1080P/ 1280×1024/ 960P/720P/ 960H/D1/CIF Output : HDMI × 1:3840 × 2160/1920 × 1080/1280 × 1024/1024 × 768. VGA : 1920 × 1080/1280 ×1024/1024 768	
	Compression	Video : Standard H.265 / H.264	
		Audio : G.711(U/A)	
Network Input	32 CH IPC audio input		
Record	Resolution	8MP 6MP/5MP/4MP/3MP/ 1280×1024/ 960P/720P/ 960H/D1/CIF 960H/D1/CIF	
	Record Stream	Dual stream recording	
	Frame Rate	P:25fps; N:30fps	
Decoding Capability	Live View/Playback	1CH 8MP; 4CH 1080P	
Alarm	Mode	Manual, sensor, motion, exception, smart events	
	Input	4CH alarm input; IPC alarm input supported	
	Output	1CH alarm output; IPC alarm output supported	
	Triggering	Record, snap, preset, e-mail, etc.	
Network	Protocol	TCP / IP, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTPs, HTTP, 802.1x PPPoE,	
	Incoming Bandwidth	112Mbps	
	Outgoing Bandwidth	112Mbps	
	Network Interface	RJ 45 1000Mbps × 1	
Storage	HDD Interface	SATA3.0 × 2, max 8T per HDD	
	Local Backup	U disk, USB mobile HDD	
	Network Backup	Yes	
General	Power Supply	DC 12V/3A	
	Working Environment	Temperature: -10 DegC+50DegC/ Humidity: 10%~90%	
	Consumption	≤ 15W (without HDD)	
	Compatibility	ONVIF	
	Dimensions (WxDxH)	380 × 268 × 45 (W × D × H)	
	Weight (without HDD)	6.0Kg	

BACK PANEL

Structure Diagram :

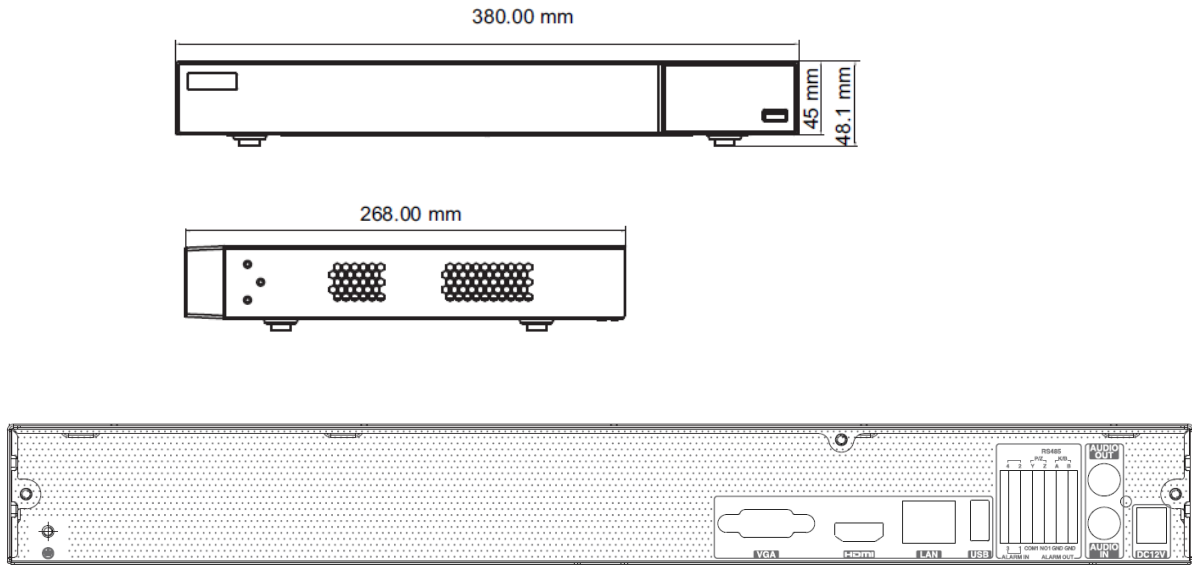

PARTCODE

DESCRIPTION

TG-V32NR

32CH IPC up to 8MP @ 30fps, 16CH Playback, 2HDD up to 8TB, H.265, 4K*2K Output, 4 In/1 Out Local Alarm, Rs485, Two-way Talk, No CVBS, RJ45 1000Mbps*1, POS

UAE Address:
P3-Hamriyah Business Centre
PO Box 50235
Hamriyah Free Zone - Sharjah - UAE.
E-mail: info@tgen5.com
Tel : +97143488459

[HTTPS://TGEN5.COM](https://tgen5.com)